


**NOTE 1** C18, C19, C20, ARE THREE SECTIONS OF THE TRIPLE GANG CONDENSER  
C3, C4, C5 ARE THE TRIMMER CONDENSERS

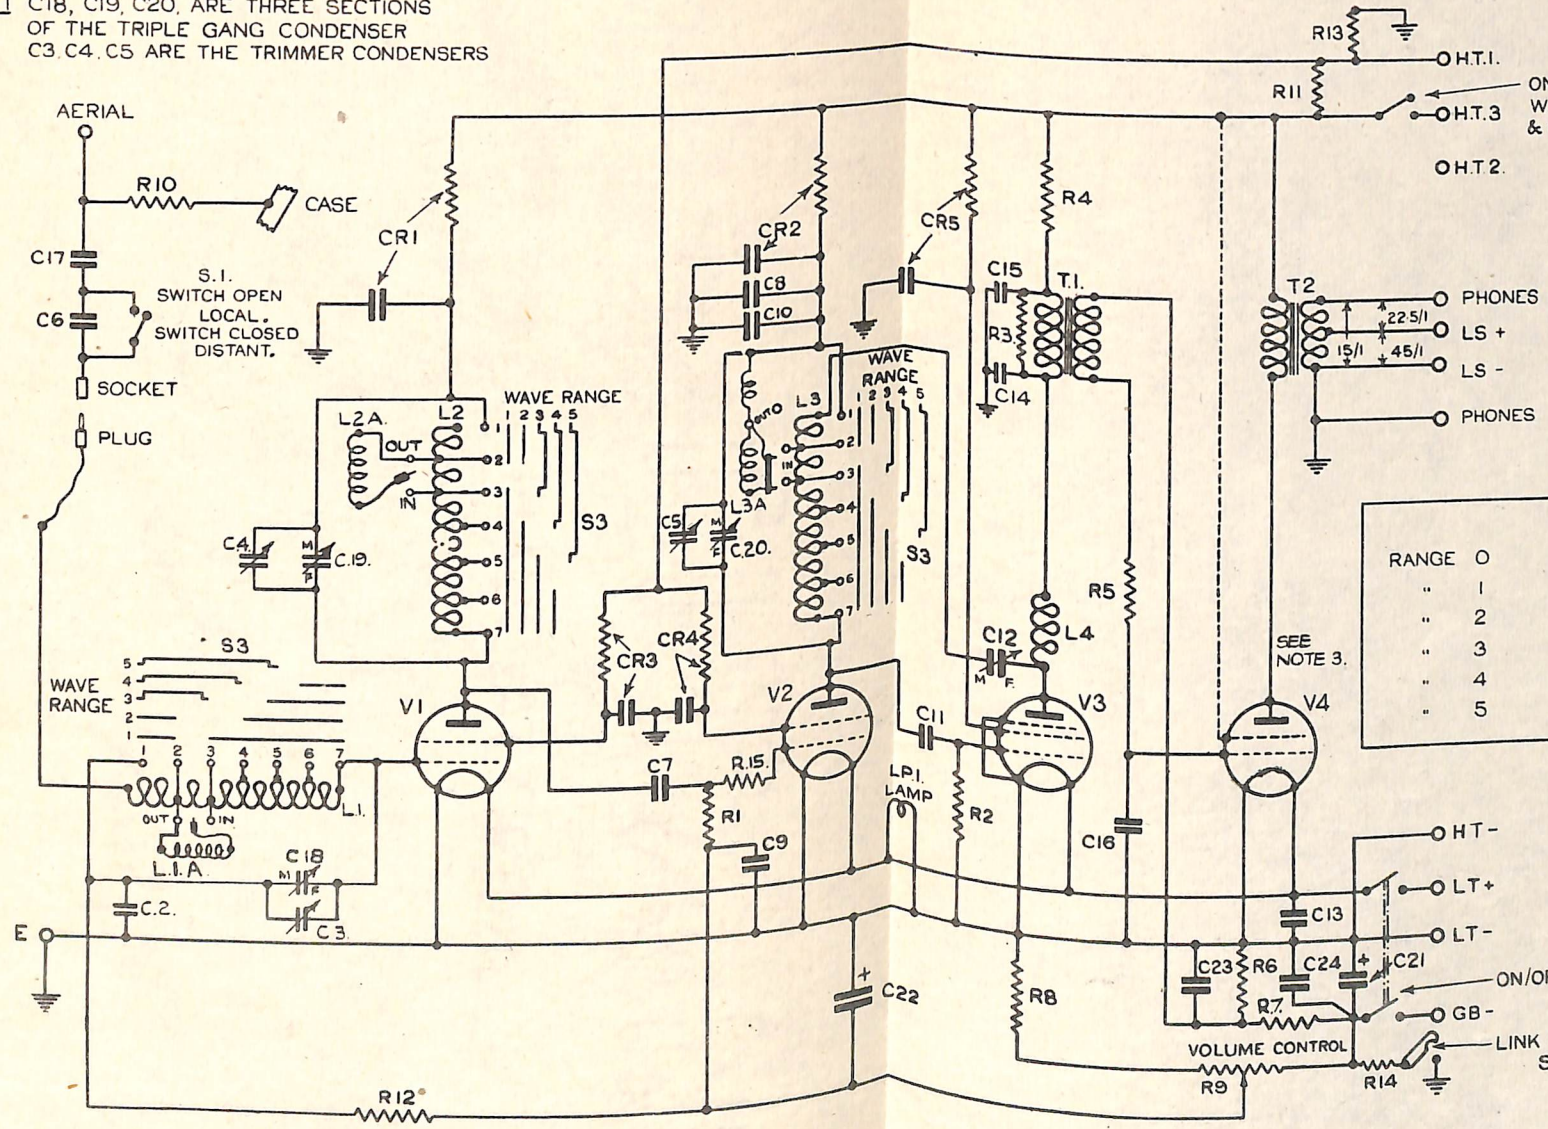

ON/OFF SWITCH (GANGED WITH SWITCH S2. IN LT & G.B. CIRCUITS.)

**NOTE 2**  
TO OBTAIN RANGE 0 SET SWITCH S3. TO RANGE 1 & TRANSFER PLUGS ON COILS L1A. L2A & L3A TO SOCKETS MARKED "IN."

**NOTE 3.**  
WHEN TETRODE IS USED AS V4 SCREEN IS CONNECTED AS SHOWN DOTTED.

WAVE RANGE	
RANGE 0	8500 - 3500 Kcs.
" 1	4500 - 2000 Kcs.
" 2	2250 - 1000 Kcs.
" 3	1080 - 460 Kcs.
" 4	510 - 215 Kcs.
" 5	235 - 100 Kcs.

SEE NOTE 3.

CH. No. 501  
ISSUE 4  
DATE 29-7-41

CH. No. 417  
ISSUE 3  
DATE 8-7-41

CH. No. N/1428  
ISSUE 2  
DATE 25-10-40.

CH. No. ISSUE DATE  
15-8-40

**THEORETICAL WIRING DIAGRAM FOR TYPE 394G RECEIVER**

**DRG. No. N/WD. 347**