





RCN Catalogue of Materiel

6625
1


TABLES 127 TO 133




6625-21-478-0034




6625-21-478-0118



6625-21-478-0278

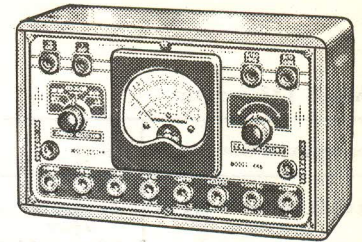

6625-21-478-0503

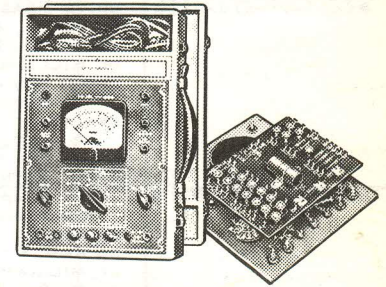

6625-21-478-0117

TABLE 133

MULTIMETER:

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|--------------------|---|--------|---------------|
| 6625-21-478-0208 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC VOLTS: 0 - 5 - 25 - 100 - 250 - 500; DC VOLTS: 0 - 0,075 - 5 - 25 - 100 - 250 - 500; DC MILLIAMPS: 0 - 2,5 - 5 - 25 - 100 - 500; OHMS: WITH INTERNAL BATTERY, 0 - 20,000; WITH EXTERNAL BATTERY, 100,000 - 500,000 - 2 MEG - 5 MEG; METER SCALE 3-1/4 x 1 IN.; COMPLETE WITH LEAD TEST LEADS, PRODS AND ALLIGATOR CLIPS; CASE (BRITISH MFR) PHENOLIC WITH HINGED METAL BACK, 4-3/4 x 3-3/4 x 1-3/4 IN. (CANADIAN MFR) WOOD, 10-5/8 x 7-1/2 x 4-1/8 IN. | 09868 | AVOMINOR 1 |
| ● 6625-21-478-0108 | UNITS MEASURED: AC VOLTS, DC VOLTS, AND RESISTANCE; AC VOLTS: 0 - 250 - 300 - 600; DC VOLTS: 0 - 250 - 300 - 600; OHMS: 0 - 2k AND 0 - 200 MEG; SENSITIVITY 1000 OHMS PER VOLT; METAL CASE WITH REMOVABLE COVER, 8-7/8 LG x 6 WD x 8-1/2 IN. HT; RECTANGULAR 5 IN. METER. | 04237 | VIBROTEST 201 |
| 6625-21-478-0109 | UNITS MEASURED: AC VOLTS, DC VOLTS AC MA, DC MA, AND RESISTANCE; AC VOLTS: 0 - 750 IN 4 STEPS; DC VOLTS: 0 - 750 IN 4 STEPS; AC MILLIAMPS: 0 - 150 IN 2 STEPS; DC MILLIAMPS: 0 - 150 IN 3 STEPS; OHMS: 0 - 3 MEG; WOODEN CASE 11 x 4-3/4 IN. | 60741 | 1125A |
| 6625-21-478-0209 | UNITS MEASURED: AC VOLTS, DC VOLTS, AC AMP, DC AMP, DC MA, DC UA, AND RESISTANCE; AC VOLTS: 0 - 5 - 25 - 30 - 250 - 300 - 750; DC VOLTS: 0 - 1 - 10 - 50 - 200 - 500 - 1000 AND 100, MILLIVOLTS DIRECT OR FOR USE WITH EXTERNAL SHUNT; AC AMP: 0,5 - 1 - 5 - 10; DC AMP: 1 - 10; DC MICROAMP: 50; DC MILLIAMP: 1 - 10 - 100; OHMS: 3000 (25 AT CENTER SCALE), 30,000 (250 AT CENTER SCALE), 300,000 (2500 AT CENTER SCALE), 3 MEG (25,000 AT CENTER SCALE), 30 MEG (250,000 AT CENTER SCALE); SENSITIVITY: 50 us, 20,000 OHMS PER VOLT DC, 1000 OHMS PER VOLT AC; COMPLETE WITH TEST LEADS; OAK CASE, 13 x 12-1/2 x 5-1/2 IN., REMOVABLE COVER; METER 4-1/2 IN. | 65092 | 785 |
| ● 6625-21-478-0110 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC AND DC VOLTS: 0 - 10 - 50 - 250 - 500 - 1000; DC MILLIAMP: 0 - 1 - 10 - 50 - 250; OHMS: 0 - 500 - 1500 - 1,5 MEG - 3 MEG; | 60741 | 1200A |

(CONTINUED NEXT PAGE)



RCN Catalogue of Materiel

6625
1

TABLE 133 (CONTD)

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|-------------------------------|---|--------|---------------|
| ● 6625-21-478-0110 (CONTD) | SENSITIVITY: 500 UA, 2000 OHMS PER DC VOLT, 40 OHMS PER AC VOLT; TWIN METERS WITH TILTING FEATURE; METAL CASE 7-7/8 x 6-1/2 x 5-5/8 IN. ; COMPLETE WITH TEST LEADS. | 60741 | 1200A |
| ● 6625-21-478-0112 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC VOLTS, 0 - 10 - 50 - 250 - 1000; DC VOLTS, 0 - 10 - 50 - 250 - 500 - 1000; DC MILLIAMPS: 0 - 10 - 100; OHMS: SHUNT TYPE CIRCUIT, 0 - 1500; SERIES TYPE CIRCUIT, 0 - 750,000 - 7.5 MEG - 15 MEG; SENSITIVITY: 200 UA, 5000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; COMPLETE WITH TEST LEADS; CASE, WITH LEATHER HANDLE, 11-7/16 x 7-7/8 x 4-1/8 IN. | 74222 | 860 |
| ● 6625-21-478-0116 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC AMP, DC MA, AND RESISTANCE; AC AND DC VOLTS: 0 - 2.5 - 10 - 50 - 1000; DC AMP: 1 - 10; DC MILLIAMPS: 0 - 0.1 - 1 - 10 - 50 - 250; OHMS: 0 - 3000 - 30,000 - 300,000 - 30 MEG; DECIBELS: MINUS 14 TO PLUS 54 IN 5 RANGES; SENSITIVITY, 50 US, 20,000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; RECTANGULAR METER; COMPLETE WITH TEST LEADS; OAK CASE WITH REMOVABLE COVER, 6-3/8 x 9-1/8 x 4-7/8 IN. | 65092 | 779 |
| ● 6625-21-478-0117 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC AMP, DC MA, DC UA, AND RESISTANCE; AC AND DC VOLTS: 0 - 2.5 - 10 - 50 - 250 - 1000; DC AMP: 0 - 1 - 10; DC MICROAMP: 0 - 100; DC MILLIAMPS: 0 - 10 - 50 - 500; DECIBELS: MINUS 18 TO PLUS 60; OHMS: 0 - 4000 - 40,000 - 400,000 - 40 MEG; SENSITIVITY: 50 UA, 20,000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; COMPLETE WITH TEST LEADS; HARDWOOD CASE WITH REMOVABLE COVER, 13 x 9-1/2 x 4-3/4 IN. ; METER 4 IN. SQUARE. | 95800 | KM |
| 6625-21-478-0119 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, DC UA, AND RESISTANCE; AC AND DC VOLTS: 0 - 10 - 50 - 250 - 500 - 1000; DC MICROAMP: 0 - 50; DC MILLIAMPS: 0 - 1 - 10 - 50 - 250; OHMS: 0 - 1000 - 300,000 - 3 MEG - 30 MEG; SENSITIVITY: 40 UA, 25,000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; 18 PUSHBUTTONS (9 ON EACH SIDE OF METER) FOR SELECTION OF DESIRED RANGE; COMPLETE WITH TEST LEADS; METAL CASE WITH COVER AND LEATHER HANDLE, 7-7/8 x 6-1/8 x 5-5/8 IN. | 60741 | 1200F |
| 6625-21-478-0375 | UNITS MEASURED: AC VOLTS, DC VOLTS, AND RESISTANCE; AC VOLTS: 0 - 10 - 100 - 1000; DC VOLTS: 0 - 1 - 10 - 100 - 1000; OHMS: 0 - 2000 - 20,000 - 200,000 = 2 MEG - 10 MEG; ACCURACY: AC VOLTS, 8 PER CENT FULL SCALE, DC VOLTS 5 PER CENT FULL SCALE, RESISTANCE 7 PER CENT FULL SCALE; PLASTIC CASE, 3-3/4 WD x 6-1/2 HT x 3 IN. DP. | 80058 | ME-77(A)/U |
| 6625-21-478-0121 | VOLTMETER AND WATTMETER; DC VOLTS: 0 - 1000 IN 4 RANGES; WATTS: 0 - 500; METER, FLUSH MTG; CASE 5-3/8 x 5-1/8 x 3-3/8 IN. | 75615 | 1516 |
| 6625-21-478-0569 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC VOLTS: 0 - 5 - 25 - 100 - 250 - 1000; DC VOLTS: 0 - 100 M/V; DC MILLIAMPS: 0 - 1 - 5 - 25 - 100 - 500; | | |

(CONTINUED NEXT PAGE)



TABLE 133 (CONTD)

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|-----------------------------|---|--------|---------------|
| 6625-21-478-0569 (CONTD) | OHMS: 0 - 200,000 - 20 MEG WITH EXTERNAL BATTERY; INCLUDES TEST LEADS WITH PRODS AND ALLIGATOR CLIPS; PHENOLIC CASE, 4-3/4 LG X 3-7/8 WD X 1-7/8 IN. DP, HINGED METAL BACK; 1.5 V BATTERY, 4000 OHMS/VOLT. | 09868 | AVOMINOR 2 |
| ●6625-21-478-0115 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC AND DC VOLTS: 0 - 7 - 140 - 350 - 1400; DC MILLIAMPS: 0 - 7 - 35 - 140; OHMS: 0 - 2000 - 20,000 - 200,000 - 20 MEG; SENSITIVITY: 100 UA, 10,000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; COMPLETE WITH TEST LEADS; LEATHERETTE-COVERED CASE WITH HANDLE AND REMOVABLE COVER, 10-1/2 X 9-3/4 X 4-3/4 IN.; RECTANGULAR 4 IN. METER. | 95800 | RN1 |
| 6625-21-478-0113 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC VOLTS: 0 - 6 - 30 - 150 - 600; DC VOLTS: 0 - 6 - 150 - 300 - 1500; DC MILLIAMPS: 0 - 3 - 6 - 30 - 150; DECIBELS: MINUS 6 TO PLUS 50 IN 4 RANGES; OHMS: 0 - 2000 - 20,000 - 200,000 - 2 MEG; SENSITIVITY: 200 UA, 5000 OHMS PER DC VOLT; COMPLETE WITH TEST LEADS; METAL CASE 5-7/8 X 3-1/16 X 2-1/8 IN.; METER 3 IN. SQUARE. | 49652 | 442 |
| 6625-21-478-0189 | UNITS MEASURED: DC VOLTS, DC MA; DC VOLTS: 0 - 5 - 10 - 15 AND 0 - 500 - 1000 - 1500; DC MA: 0 - 300; 30-DIVISION SCALE; LUMINOUS GREEN POINTER; ROUND FLUSH MTG CASE, 2-3/16 IN. DIA, FLANGE 2-11/16 IN. DIA. | 16688 | 210 |
| 6625-21-478-0278 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC AMP, AND RESISTANCE; AC AND DC VOLTS: 25 MV - 2.5 V - 10 - 25 - 100 - 250 - 1000 - 2500; DC AMP: 1 MA - 100 MA - 1 AMP - 2.5 - 10; OHMS: 0 - 2000 - 20,000 OHMS - 20 MEG; USING EXTERNAL VOLTAGE SOURCE 0 - 200 MEG; SENSITIVITY: 20,000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; MOVEMENT REVERSING SWITCH; OVERLOAD CUTOFF; CASE (NATO STOCK NO. 6625-21-478-0299) 8-1/2 X 7-1/4 X 4-1/2 IN. DP. | 09868 | AVOMETER 8 |
| ●6625-21-478-0034 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC AMP, DC MA, DC UA, AND RESISTANCE; AC AND DC VOLTS: 2.5 - 10 - 50 - 250 - 1000 - 5000; DC AMP: 10; DC MA: 0 - 10 - 100 - 500; DC UA: 100; DECIBELS 5 RANGES: MINUS 12 TO PLUS 55; OHMS: 0 - 2000 (12-OHM CENTER), 0 - 200,000 (1200-OHM CENTER), 0 - 20 MEG (120,000-OHM CENTER) SENSITIVITY: 50 UA, 20,000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; OUTPUT AC AND DC VOLTS: 2.5 - 10 - 50 - 250 - 1000; COMPLETE WITH TEST LEADS AND OPERATOR'S MANUAL; MOLDED BAKELITE CASE WITH LEATHER HANDLE, 5-1/4 X 7 X 3-1/8 IN. DP; METER, 4-1/2 IN. | 55026 | 260 |
| ●6625-21-478-0062 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, DC UA, AND RESISTANCE; AC AND DC VOLTS: 0 - 2.5 - 10 - 50 - 250 - 1000 - 5000; DC MA: 0 - 500 IN 5 RANGES; DC UA: 100; OHMS: 0 - 50 MEG (IN 5 RANGES); SENSITIVITY: 50 UA, 20,000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; OUTPUT: 0 - 100 VOLTS IN 5 RANGES; CAST ALUMINUM CASE (NATO STOCK NO. 6625-21-478-0314) PERMANENTLY CONTAINED IN A LEATHER CARRYING CASE, 8-1/4 X 5-3/4 X 4-1/4 IN., WITH A ZIPPER FASTENING POUCH CONTAINING TEST LEADS AND A FLAP FOR COVERING FACE OF METER WHEN NOT IN USE; OPEN INSTRUCTION CARD GLUED INSIDE COVER; CARRYING HANDLE CAN BE LENGTHENED INTO A SHOULDER STRAP. | 35104 | 955 |
| ●6625-21-478-0083 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC AMP, DC MA, DC UA, AND RESISTANCE; AC AND DC VOLTS: 0 - 2.5 - 10 - 50 - 250 - 1000 - 5000; DC AMP: OPLO; DC MA: 0 - 2.5 - 10 - 50 - 250 - 1000; DC UA: 0 - 50; | 95800 | 460 |

(CONTINUED NEXT PAGE)



TABLE 133 (CONTD)

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|--------------------|---|--------|---------------|
| ● 6625-21-478-0083 | DECIBELS (IN 5 RANGES): MINUS 30 TO PLUS 3, MINUS 18 TO PLUS 15, MINUS 4 TO PLUS 29, PLUS 10 TO 43, PLUS 22 TO 55; OHMS: 0 - 1k - 10k - 1 MEG - 100 MEG; 6 OUTPUT RANGES, 0 - 2.5 - 10 - 50 - 250 - 1000 - 5000; DC RANGES 2 PER CENT OF FULL SCALE DEFLECTION, AC RANGES 0 - 2.5, 5 PER CENT OF FULL SCALE DEFLECTION, ALL OTHER RANGES 3 PER CENT; SENSITIVITY: 20,000 OHMS PER VOLT; CAST ALUMINUM CASE WITH RECESSED 5 IN. METER AND CONTROLS; HEAVY DUTY LEATHER CARRYING CASE FITTED WITH POUCH FOR TEST LEADS. | 95800 | 460 |
| ● 6625-21-478-0111 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC AND DC VOLTS: 0 - 5000, IN 5 STEPS; DC MA: 0 - 5000, IN 4 STEPS; OHMS: 0 - RX10,000 IN 4 STEPS; COMPLETE WITH TEST LEADS; REQUIRES A 6 VOLT AND A 1-1/2 VOLT BATTERY; WOODEN CASE WITH BAKELITE PANEL, 9-1/2 x 8-1/2 x 5-1/4 IN. | 35533 | SA-2 |
| ● 6625-21-478-0114 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, DC UA, AND RESISTANCE; AC AND DC VOLTS: 0 - 2.5 - 10 - 50 - 1000 - 5000; OUTPUT, AC VOLTS: 2.5 - 10 - 50 - 250 - 1000 - 5000; DC MA: 0 - 10 - 100 - 500; DC UA: 0 - 250; DECIBELS: MINUS 12 TO PLUS 52, IN 5 RANGES; SENSITIVITY: 200 US, 5000 OHMS PER DC VOLT, 1000 OHMS PER AC VOLT; COMPLETE WITH TEST LEADS; MOLDED BAKELITE CASE WITH LEATHER HANDLE, 5-1/2 WD x 7 HT x 3 IN. DP; 4-1/2 IN. METER. | 55026 | 215 |
| ● 6625-21-478-0300 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC AMP, DC MA, DC UA, AND RESISTANCE (20,000 OHMS PER VOLT); AC VOLTS: 2.5 - 10 - 50 - 250 - 1000 - 5000; DC VOLTS: 2.5 - 10 - 50 - 300 - 1000 - 5000; DC AMP: 0 - 10; DC MA: 0 - 10 - 100; DC UA: 0 - 100; OHMS: 0 - 2000 (12-OHM CENTER), 0 - 200,000 (1200-OHM CENTER), 0 - 20 MEG (120,000-OHM CENTER); DIM., 12-3/4 x 10-1/8 x 5-3/8 IN. | 55026 | 221 |
| 6625-21-478-0118 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC AMP, DC MA, DC UA, AND RESISTANCE; AC AND DC VOLTS: 0 - 3 - 12 - 60 - 300 - 1200 - 6000; OUTPUT, CAPACITOR IN SERIES WITH AC VOLT RANGES; DC AMP: 0 - 12 AT 250 MV; DC MA: 0 - 1 - 2 - 12 - 120 AT 250 MV; DC UA: 0 - 60 AT 250 MV; DECIBELS: MINUS 30 TO PLUS 70; OHMS: 0 - 1000 (4.4 AT CENTER SCALE), 0 - 10,000 (44 AT CENTER SCALE), 0 - 1 MEG (4400 AT CENTER SCALE); 0 - 100 MEG (440,000 AT CENTER SCALE); SENSITIVITY: 20,000 OHMS PER DC VOLT, 5000 OHMS PER AC VOLT; RESISTOR, SHUNTS, RECTIFIER AND BATTERIES HOUSED IN MOLDED BASE INTEGRAL WITH THE SWITCH; COMPLETE WITH TEST LEADS; BLACK MOLDED CASE, 7-1/2 x 5-1/2 x 3-7/32 IN. | 60741 | 630 |

TABLE 135

MULTIMETER: ADMIRALTY PATTERN.

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|------------------|---|--------|---------------|
| 6625-21-478-0230 | 0 - 200 v, 0 - 50 MA DC, GRADUATED IN INCREMENTS OF 1, 50 DIVISIONS; CALIBRATED FOR NON-MAGNETIC DIAL; BLACK MARKINGS ON WHITE BACKGROUND; INTERNAL RESISTANCE, 20,055 OHMS; HAS 3 WIREWOUND RESISTANCE BOBBINS MOUNTED ON BAKELITE STRIP ON REAR OF INSTRUMENT, VALUES OF 40 K, 980 AND 2.3 OHMS; ROUND CASE, 2-3/16 IN. DIA, FLANGE DIA 2-25/32 IN. | 10413 | 4599 |



TABLE 137

MULTIMETER, REPLACEMENT:

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|------------------|---|--------|---------------|
| 6625-21-478-0572 | RANGES: OHMS, 0 - 2000 - INFINITY; VOLTS, 0 - 10; SENSITIVITY: 50 MICROAMPERES, 250 MILLIVOLTS, FULL SCALE; INTERNAL RESISTANCE 5000 OHMS; WHITE BACKGROUND WITH VOLTS IN BLACK, OHMS IN GREEN; FLANGE MTD; 2 SOLDER LUG TERMINALS; 3-1/2 IN. DIA; EQUIP: ME-77A/U | 81350 | ME-5008/ME-77 |

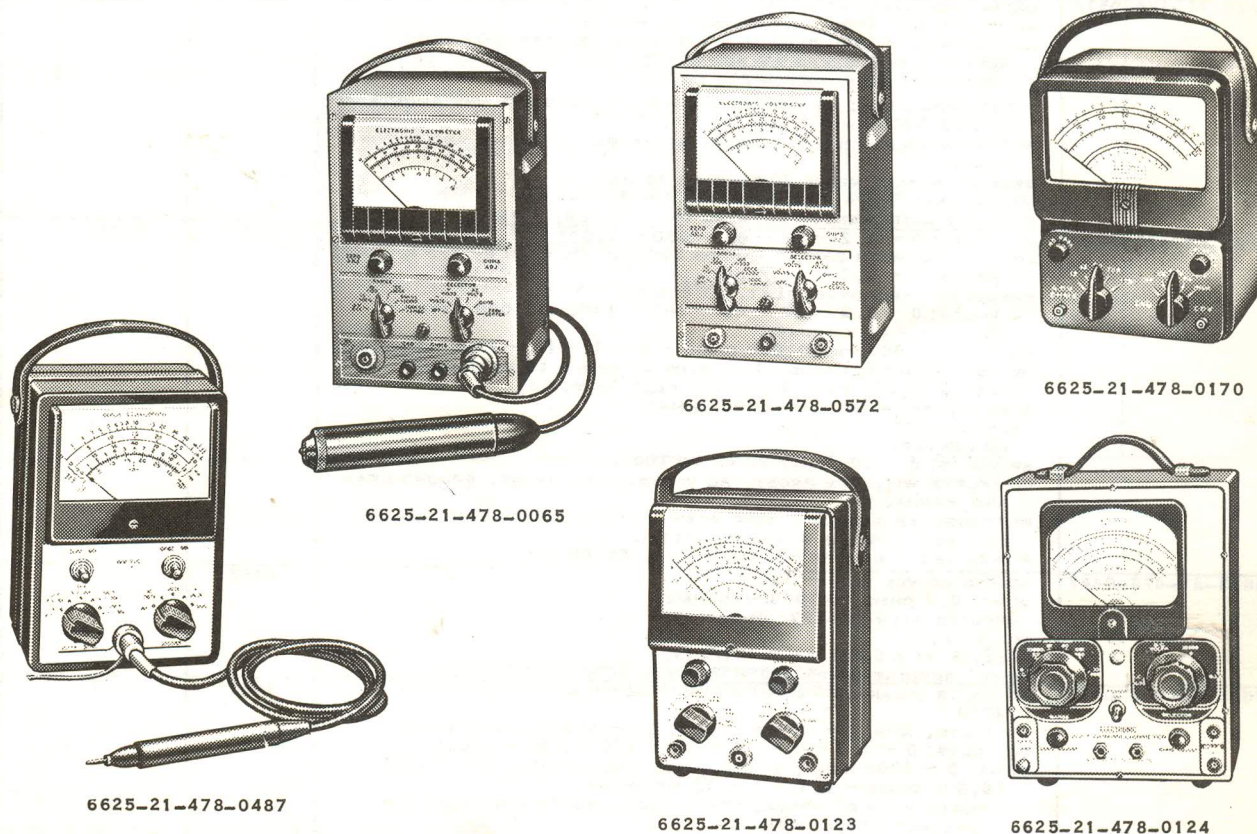


TABLE 139

MULTIMETER: ELECTRONIC TYPE.

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|--------------------|---|--------|---------------|
| ● 6625-21-478-0065 | UNITS MEASURED: AC VOLTS, DC VOLTS, AND RESISTANCE; AC VOLTS: 0 - 1000; DC VOLTS: 0 - 1000; OHMS: 0 - 1000 OHMS - 1000 MEG; FREQUENCY RESPONSE: 30 CPS TO 250 MC; CASE 6-5/16 WD X 9-5/8 HT X 6-1/4 IN. DP; POWER REQUIREMENTS, 105-125 VAC, 50-60 CPS. | 49671 | WV-75A |
| ● 6625-21-478-0122 | UNITS MEASURED: AC VOLTS, DC VOLTS, DC MA, AND RESISTANCE; AC VOLTS: 0 - 2.5 - 5 - 10 - 25 - 100 - 250; DC VOLTS: 0 - 2.5 - 5 - 10 - 50 - 250 - 500 - 1000; DC MA: 0 - 2.5 - 10 - 24 - 100 - 250 - 1000; OHMS: 0 - 1000 - 10,000 - 100,000 OHMS - 1 MEG - 10 MEG - 1000 MEG; INPUT IMPEDANCE: 12 MEG IN PARALLEL WITH 6 UUF (CONSTANT); COMPLETE WITH TEST LEADS AND PRODS; STEEL CASE, 19 X 5-1/2 X 8-1/4 IN.; POWER REQUIREMENTS, 105-120 VAC, 50-60 CPS. | 74330 | A518 |

(CONTINUED NEXT PAGE)



TABLE 139 (CONTD)

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|-------------------|--|--------|---------------|
| 6625-21-478-0394 | <p>UNITS MEASURED: AC VOLTS, DC VOLTS, AND RESISTANCE; AC VOLTS: 0 - 2.5 - 5 - 10 - 50 - 100 - 250; DC VOLTS: 0 - 2.5 - 5 - 10 - 50 - 250 - 500 - 1000; OHMS: 0 - 1000 OHMS, 0 - 10,000 OHMS, 0 - 100,000 OHMS, 0 - 1 - 10 - 1000 MEGOHMS; ACCURACY: AC VOLTS 6 PER CENT, DC VOLTS PER CENT, OHMS 4 PER CENT; INCLUDES TEST PROBE MX-1797()/U; TYPE TS-505B/U; ALUMINUM ALLOY CASE, 9-3/4 LG X 9 WD X 6-1/8 IN. DP; POWER REQUIREMENTS, 90-132 VAC, 50-1000 CPS, 1 PH.</p> | 80667 | D-11700 |
| 6625-21-478-0512 | <p>UNITS MEASURED: AC VOLTS, DC VOLTS, AND RESISTANCE; AC VOLTS: 0 - 1000, IN 6 STEPS ±5 PER CENT; DC VOLTS: 0 - 1000 PLUS IN 6 STEPS ±2 PER CENT; 0 - 1000 NEGATIVE IN 6 STEPS ±2 PER CENT; SENSITIVITY: BASIC METER 200 UA; INPUT IMPEDANCE: 10 MEG DC, 10 MEG AC PLUS 170 UUF SHUNTED BY 200,000 OHMS; ACCESSORIES SUPPLIED: 1 EACH, AC PROBE, DC PROBE AND GROUND LEAD; DECIBEL SCALE: MINUS 20 TO PLUS 16 DB; METAL CASE 9-3/4 HT X 6-3/4 WD X 6-1/2 IN. DP; POWER REQUIREMENTS, 105-125 VAC, 60 CPS, 1 PH.</p> | 49671 | 195-A |
| ●6625-21-478-0170 | <p>AC VOLTS: 0 - 1.2 - 12 - 60 - 300 - 1200; IMPEDANCE (WITH CABLE) APPROX 200 UUF SHUNTED BY 275 K OHMS; AF VOLTS: 0 - 1.2 - 12 - 60; FREQUENCY RESPONSE: FLAT, 25 CPS TO 100 KC; DC VOLTS: 0 - 1.2 - 12 - 60 - 300 - 1200 (30,000 WITH ACCESSORY HI V PROBE); OHMS: 0 - 1000 - 100,000 OHMS - 0 - 1 - 10 - 1000 MEGOHMS; DECIBEL RANGES: MINUS 20 TO PLUS 3, MINUS 10 TO PLUS 23, PLUS 4 TO 37, PLUS 18 TO 51, PLUS 30 TO 63; ZERO POWER LEVEL 1 MV, 600 OHMS; GALVANOMETER; ZERO CENTER; RF VOLTS: 0 - 20, FLAT 20 KC TO 100 MC; COMPLETE WITH DCV PROBE, AC VOLTS-OHMS PROBE, GROUND LEAD AND MANUAL RECTANGULAR BAKELITE CASE WITH ROLL TOP, 7 X 5-1/4 X 3-1/8 IN.; RECTANGULAR 4-1/2 IN. METER; POWER REQUIREMENTS, 105-125 VAC, 50-60 CPS.</p> | 55026 | 303RT |
| 6625-21-478-0487 | <p>AC AND DC VOLTS: 0 - 1200; OHMS: 0.2 OHMS TO 1000 MEGOHMS; SUPPLIED WITH WG-299C PROBE; WT: 5 LB; CASE, 8 HT X 5-3/8 WD X 4-1/2 IN. DP; POWER REQUIREMENTS, 105-125 VAC, 60 CPS.</p> | 49671 | wv-77c |
| ●6625-21-478-0123 | <p>AC VOLTS (PEAK-TO-PEAK): 0 - 4 - 42 - 140 - 420 - 1400 - 4200; AC VOLTS, RMS: 0 - 1 - 5 - 15 - 50 - 150 - 500 - 1500; DC VOLTS: 0 - 1.5 - 5 - 15 - 50 - 150 - 500 - 1500; OHMS: 0 - 1000 MEG (CENTER SCALE VALUES 10 - 100 - 1000 - 10,000 OHMS - 0.1 - 1 - 10 MEGOHMS); COMPLETE WITH DC PROBE; TEST LEADS, WG289 HIGH-VOLTAGE PROBE AND WG206 RESISTOR; CASE 7-7/8 X 5-3/4 X 4-1/2 IN.; POWER REQUIREMENTS 105-125 VAC, 50-60 CPS.</p> | 49671 | wv97A |
| ●6625-21-478-0125 | <p>AC AND DC VOLTS: 0 - 1 - 5 - 10 - 50 - 100 - 250 - 500 - 1000 - 5000; DC AMP: 0 - 10; DC MA: 0 - 1 - 5 - 10 - 50 - 100 - 250 - 500; OHMS: 0 - 1k - 10k - 100k - 1 MEG - 10 MEG - 100 MEG - 1000 MEG; COMPLETE WITH LEADS, AC PROBE AND MANUAL; HARDWOOD CASE, 8-1/2 X 9-1/2 X 8 IN.; RECTANGULAR 4-1/2 IN. METER; POWER REQUIREMENTS, 105-125 VAC, 50-60 CPS.</p> | 55026 | 266 |
| 6625-21-478-0124 | <p>AC VOLTS: 0 - 10,000, IN 6 STEPS; DC VOLTS: 0 - 10,000, IN 6 STEPS, CENTER ZERO; DC MA: 0 - 10,000, IN 6 STEPS; OHMS: 0 - 10 MEG, IN 6 STEPS; COMPLETE WITH TEST LEADS; STEEL CASE 10-1/2 LG X 7-3/4 WD X 7 IN. DP; METER 5 X 4-7/8 IN.; POWER REQUIREMENTS, 110 VAC, 60 CPS.</p> | 74330 | 202B |



TABLE 141
MULTIMETER KIT:

| NATO STOCK NO. | DETAIL | NATOSC | REFERENCE NO. |
|-------------------|--|--------|---------------|
| ●6625-21-478-0024 | <p>CONTAINS ALL COMPONENTS FOR BUILDING ELECTRONIC VOLT-OHMETER; MEASURES: AC VOLTS, 0.01 - 0.03 - 0.1 - 0.3 - 1 - 3 - 10 - 30 - 100 - 300; DECIBELS: MINUS 40 TO PLUS 50;</p> <p>TUBES: 1 EACH 6AU6 AND 6AT6; CASE 7-3/8 x 4-11/16 x 4-1/8 IN. ; POWER REQUIREMENTS, 105-125 VAC, 50-60 CPS.</p> | 88273 | AV-2 |
| ●6625-21-478-0023 | <p>CONTAINS ALL COMPONENTS FOR BUILDING ELECTRONIC VOLT-OHMETER; MEASURES: AC VOLTS, 7 RANGES, 0 - 1.5 - 5 - 15 - 50 - 150 - 500 - 1500; DC VOLTS, 7 RANGES, 0 - 1.5 - 5 - 15 - 50 - 150 - 500 - 1500; OHMS, 7 RANGES, 0.1 TO 1000 MEGOHMS, WITH INTERNAL BATTERY; TUBES: 1 EACH 12AU7 AND 6H6; METER: 4-1/2 IN. 200 UA SIMPSON; CASE 7-3/8 x 4-11/16 x 4-1/8 IN. ; POWER REQUIREMENTS, 105-125 VAC, 50-60 CPS.</p> | 88273 | V-6 |